


HDMI Extender

Product Number: HDMIEXT

ZeeVee HDMI Extender

ZeeVee HDMI Extender is a 50M HDMI and IR Extender Pair. Transmitter and Receiver. UHD@60Hz HDR Support. Includes Transmitter, Receiver, InfraRed TX/RX and two International Power supplies. Requires power on both ends.

HDMIEXT

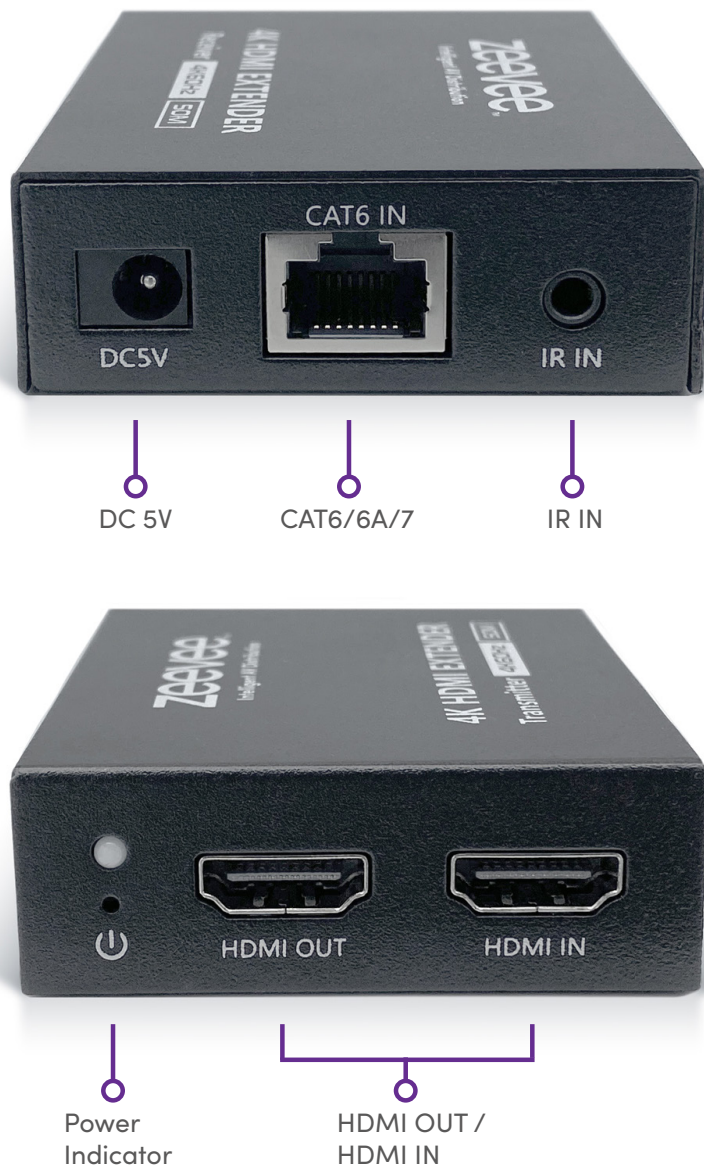

What's in the box?

- Transmitter
- Receiver
- 2x Universal Power Adapters
- IR Blaster cable
- IR Receiver cable

HDMI Extender

Product Number: HDMIEXT

Feature	Transmitter	Receiver																		
Input Interface	HDMI Type A	RJ45																		
Output Interface	HDMI Type A, RJ45	HDMI Type A																		
Max transfer rate	18 Gbps	18 Gbps																		
Max transmission bandwidth	600 MHz	600 MHz																		
EDID passthrough	Yes	Yes																		
Compatibility	HDMI 2.0 (Deep color, HDR, 4:4:4)	HDMI 2.0 (Deep color, HDR, 4:4:4)																		
HDCP	HDCP 2.2, HDCP 1.4	HDCP 2.2, HDCP 1.4																		
Resolutions	Supports all major VESA resolutions and variations including full HDR* support: <table border="0"> <tr> <td>640x480 (p/i)</td> <td>1920x1080 (p/i)</td> </tr> <tr> <td>720x576 (25Hz/50Hz)(p/i)</td> <td>2048x1536 (p)</td> </tr> <tr> <td>800x600 (p)</td> <td>3440x1440 (p)</td> </tr> <tr> <td>1024x768 (p)</td> <td>3840x2160 (p) Including 4:4:4, 60 Hz support</td> </tr> <tr> <td>1280x720 (p/i)</td> <td>4096x2160 (p) (Note: Only supported to 30m maximum) all at 24/25/29.97/30/50/59.94/60Hz refresh rates except where noted</td> </tr> <tr> <td>1280x1024 (p)</td> <td></td> </tr> <tr> <td>1366x768 (p)</td> <td></td> </tr> <tr> <td>1440x1080 (p)</td> <td></td> </tr> <tr> <td>1600x1200 (p)</td> <td></td> </tr> </table>		640x480 (p/i)	1920x1080 (p/i)	720x576 (25Hz/50Hz)(p/i)	2048x1536 (p)	800x600 (p)	3440x1440 (p)	1024x768 (p)	3840x2160 (p) Including 4:4:4, 60 Hz support	1280x720 (p/i)	4096x2160 (p) (Note: Only supported to 30m maximum) all at 24/25/29.97/30/50/59.94/60Hz refresh rates except where noted	1280x1024 (p)		1366x768 (p)		1440x1080 (p)		1600x1200 (p)	
640x480 (p/i)	1920x1080 (p/i)																			
720x576 (25Hz/50Hz)(p/i)	2048x1536 (p)																			
800x600 (p)	3440x1440 (p)																			
1024x768 (p)	3840x2160 (p) Including 4:4:4, 60 Hz support																			
1280x720 (p/i)	4096x2160 (p) (Note: Only supported to 30m maximum) all at 24/25/29.97/30/50/59.94/60Hz refresh rates except where noted																			
1280x1024 (p)																				
1366x768 (p)																				
1440x1080 (p)																				
1600x1200 (p)																				
Transmission Distance	50m maximum	50m maximum																		
Audio Formats	LPCM up to 8 channels. All encoded audio formats.	LPCM up to 8 channels. All encoded audio formats.																		
IR Interface	3.5mm IR Out Female	3.5mm IR In Female																		
IR Frequency	20KHz ~ 60 KHz	20KHz ~ 60 KHz																		
Power Supply	DC5V / 500mA	DC5V / 500mA																		
Power Consumption	2.3W	1.5W																		
Operating Temperature	-20°C ~ 60°C	-20°C ~ 60°C																		
Weight	130g	130g																		
Dimensions	78mm x 60mm x 21mm	78mm x 60mm x 21mm																		
Certifications and Warranty																				
Standard	CE (62368) RoHS FCC	CE (62368) RoHS FCC																		
Warranty	1 year																			