


Product Number: ZvSync-NA

## ZvSync QAM Tuner

ZvSync QAM Tuner is a digital QAM/ATSC tuner/decoder providing video output via composite with analog audio or HDMI with embedded digital audio. Includes IR pigtail, IR remote control, and power supply.

### ZvSync-NA

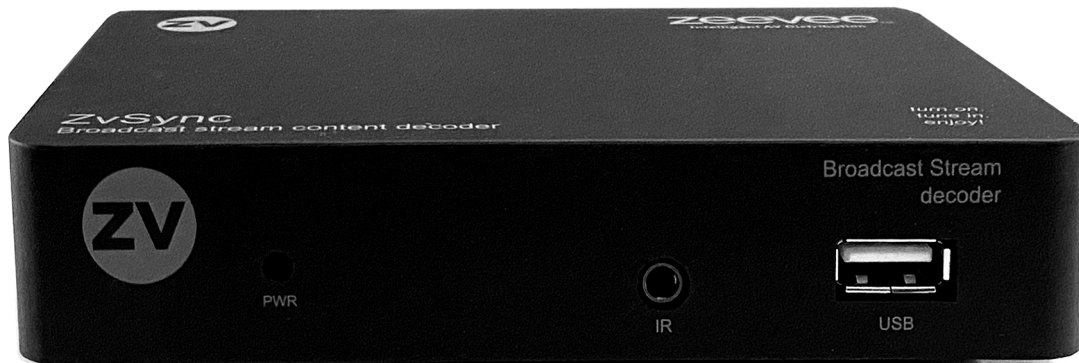

IR Port      USB Port



Coax Input      HDMI 2.0 Output      +12VDC Power Input

## What's in the box?

- ZvSync QAM Tuner
- IR Remote Control
- IR Pigtail
- Power Supply

# RF Tuner

Product Number: ZvSync-NA

**zeevee**  
AV Over IP Made Easy

General	
Compliance	UL, CE, TuV, CSA, FCC Low Voltage Directive 2006/95/EC EN60065:2002+A1:2006 EMC Directive 2004/108/EC EN 55 013:2001+A1:2003+A2:2006, EN 55 020:2007 EN 61 000-3-2:2006, EN 61 000-3-3:2008
Unit Dimensions (including ports)	10.16 x 13.01 x 3.18 cm
Carton Dimensions (individual)	8.89 x 17.15 x 14 cm
Shipping Weight	18 oz
Warranty	1 Year
Tuner	
Input Frequency Range	48-862MHz
RF Input Level	-20 to -82dBm
RF Bandwidth	6MHz
Modulation	ATSC(8VSB) 16QAM, 64QAM, 256QAM
Video	
Decoder Format	MPEG2 MP@ML/HL
Output Format	480i, 480p, 576i, 576p, 720p, 1080i, 1080p60Hz
Aspect Ratio	4:3, 16:9, Auto
Output Ports	HDMI (v1.3C), CVBS
Audio	
Decoder Format	MPEG-1(layer 1 & 2 & 3), WMA, AC-3
Audio Output	Digital Audio over HDMI, RCAx2(L/R)
USB2.0	
Supported Capacity	Unlimited
Supported Media	MP3, WMA, JPEG, BMP, AVI
Power	
Supply Voltage (Wall)	100-240VAC 50-60Hz
Supply Voltage (ZvSync Unit)	5VDC
Maximum Power Consumption	10W
Standby Power Consumption	<0.8W
Nominal Power Consumption	5W
Accessories (included)	
Remote Control	Controls decoder with learning function for basic control of television
AA Batteries (2x)	Remote control power
Composite Cable	Connects to television when using CVBS output
IR Sensor	Connects to IR port, allows tuner to be installed in an unobtrusive location
External Power Supply	Connects to AC outlet, provides low voltage DC to tuner unit

## ENTIRE PRODUCT LINE:

STBi3      ZvSync-NA      ZvSync-EU